





# ENVIRO

## H SERIES

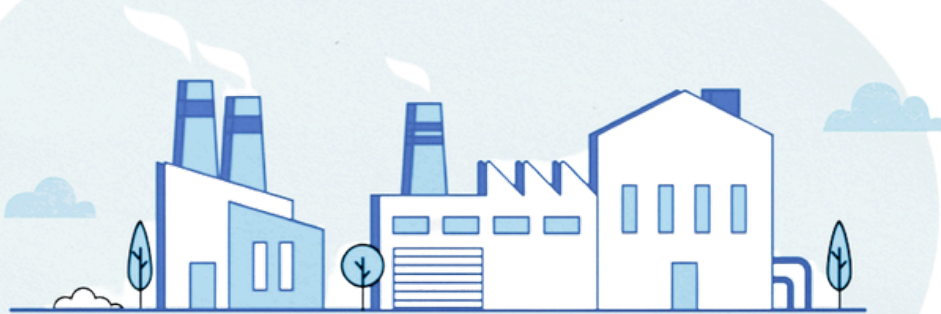

COMMERCIAL + INDUSTRIAL

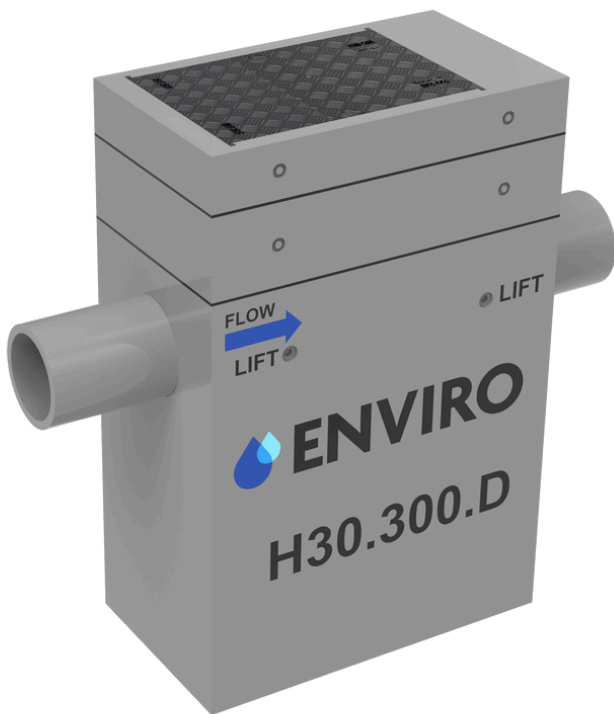

- Design service life of **100 years** for fixed parts + 25 years for servicable parts
- Made using 'green concrete' **reducing carbon emission by more than 80%** when compared to other materials
- Internal components manufactured from **high grade stainless steel**, complying with International Corrosion Standards. No welding necessary
- The safest solution with **no confined space entry** required
- Installation is simple and prompt without the need for site closure + with minimal disruption
- Enviro systems are self ballasting + are fully structural

Speak to one of Enviro's friendly Engineers today



Shone +61 427 648 489  
Digin +61 419 785 289



info@enviroaustralis.com.au



PO BOX 34, Angaston, South Australia 5353



**GOOD  
DESIGN  
AWARD<sup>®</sup>  
WINNER**






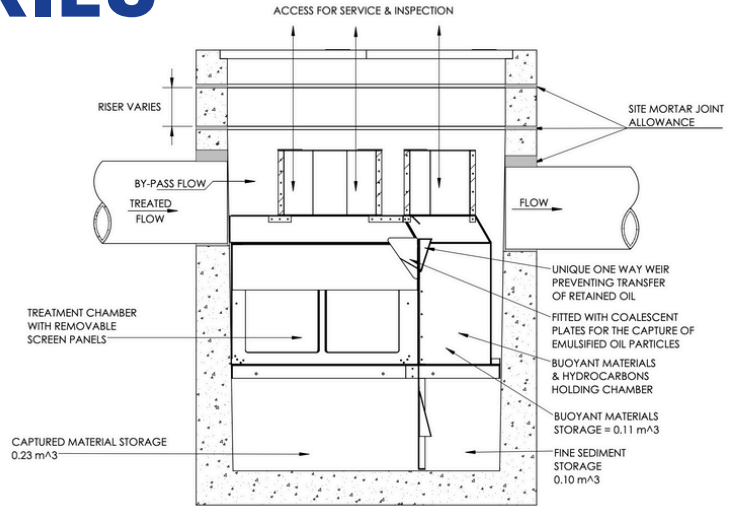
# ENVIRO

## H SERIES

**“Enviro systems ensure the highest compliance at the lowest cost.”**

Enviro systems are:

-  45% lower cost to install
-  87% lower cost to maintain
-  77% lower cost to own over 25 years compared to alternative systems.



*H Series is the optimal system for Commercial + Industrial applications due to the unique oil/water separator function which is certified to EN858-1 which has undergone extensive performance stress testing by independent authorities. These tests indicate the highest compliance with EPA Legislation and Guidelines which prohibit the discharge of pollutants into stormwater. The H Series system removes 99.95% of petroleum hydrocarbons, making it the safest and easiest system to install, maintain and support environmental and sustainability compliance.*

Performance testing verifies pollutant removal rates:

Pollutants Reduction Claim	% Reduction (minimum requirement)	% Reduction (as tested)
Total Suspended Solids (TSS)	85%	90%
Total Phosphorous (TP)	60%	97%
Total Nitrogen (TN)	45%	85%
Total Petroleum Hydrocarbons	99.95%	99.95%
Gross Pollutants	90%	95%

(Left) Natural Stormwater  
(Right) Results after single pass in Enviro H45



**Results from full scale testing conducted by the Australian Flow Management Group in 2018 on the Enviro H45 oil/water separator system.**

Hydraulic Resistance K Factor = 0.425  
Inlet to outlet differential = 25mm